PRINTING SPECIFICATIONS GUIDE

Please read the following information before setting up your artwork.

By providing us with the correct artwork, we can produce consistent results every time, and be able to print your job quickly and have it back to you in the fastest time possible. We cannot accept responsibility for errors due to files supplied incorrectly.



Standard Product Sizes

Business Card	90 x 54mm
A6	148 x 105mm
DL Flyer	210 x 98mm
DL Brochure (3 x Panels)	(97 - 100 - 100mm) x 210mm (Outside) (100 - 100 - 97mm) x 210mm (Inside) See page 5 for further details
2 page DL (Folded)	210 x 196mm (98 x 210mm when folded) See page 6 for further details
A5	210 x 148mm
A4	210 x 297mm
A3	297 x 420mm
SRA3 (Oversize A3)	320 x 450mm
A2	420 x 594mm
A1	594 x 841mm




How to set up your files



BLEED, TRIM AND SAFE AREAS

2mm bleed is required to be added to all files where an image, colour or graphic element will meet the edge of the finished document. The below diagram illustrates how to set up your file with bleed, and also how to make sure no important information is trimmed off the finished document.

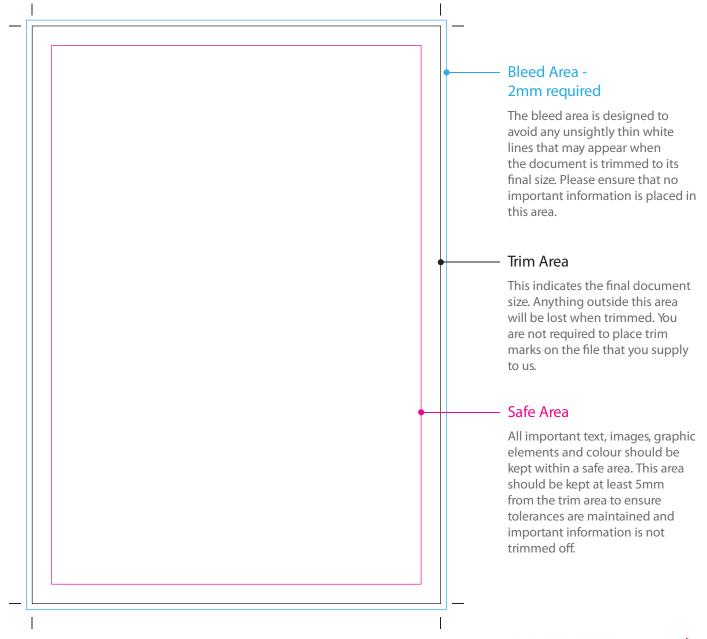

How to set up your files



BLEED, TRIM AND SAFE AREAS

Below are examples of how to - and how not to - layout your files utilising bleed, trim and safe areas.



This example contains some problems that should be avoided when creating your file. The document does not contain any bleed, and the important information is positioned too close to the edge of the document.

In this example, the bleed, trim and safe areas have all been correctly utilised. The image and all other elements that touch the edge of the document extend into the 'bleed area'. All the important information such as the text and logo are contained within the 'safe area' and avoid the risk of being trimmed off the printed document.






How to set up your DL Brochure




GRAPHIC DESIGN & PRINTING CONSULTANTS

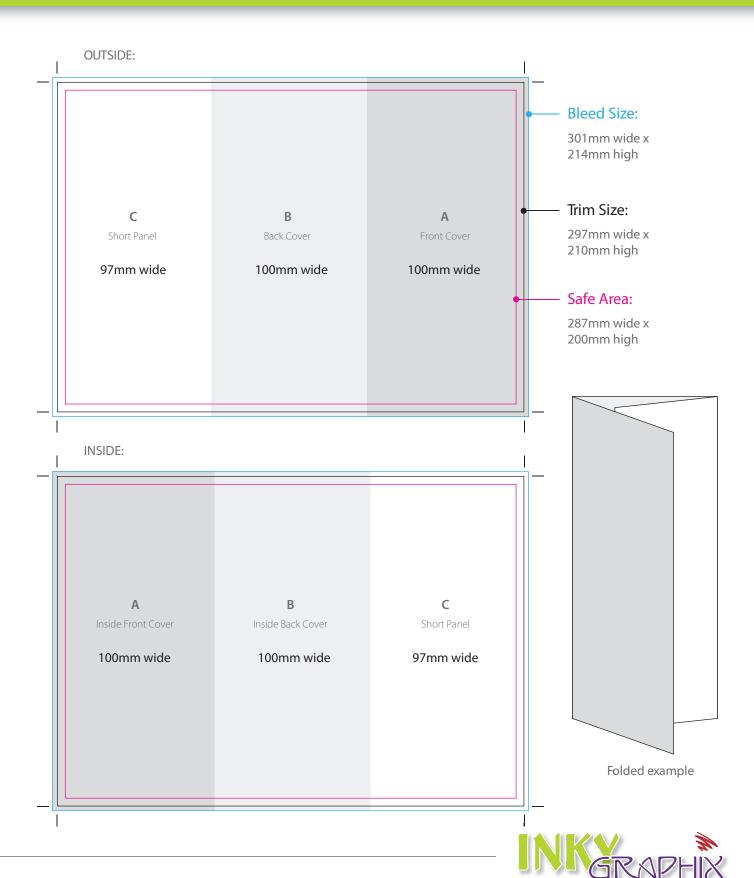

How to set up your 2 page DL Brochure





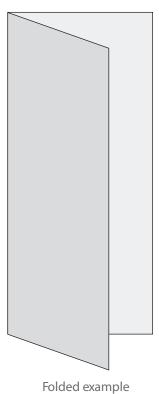

Things to consider



PAGE LAYOUT, COLOURS & FONTS

- · Please supply files as single, subsequent pages only.
- · Each page much have 2mm bleed on all four sides.
- Postscript, True Type or open Type fonts are recommended.
- Fonts should be outlined where possible.
- Any black/grey text should be made up of a percentage of black only.
- Trapping should be turned off.
- Our rich black breakdown is Cyan 30%, Magenta 30%, Yellow 30% and Black 100%.
- · Avoid using small white type reversed out of solid areas.

HOW TO SAVE YOUR IMAGES

- All images should be 300dpi at 100% size.
- All images to be CMYK colour mode.
- Any line art specifically bitmap files should be 600dpi.
- Images should be scaled, rotated and colour managed in the images native programme.



PDF file format



We require you send to us a High Resolution PDF file for printing. Please ensure that you embed fonts when creating a PDF file.

• Postscript, True Type or Open Type fonts are recommended.

INSPECT AND CHECK YOUR PDF FILE PRIOR TO SENDING TO US

Here is a checklist to follow. While not all of these may apply to each job, this will help to make sure you provide your files correctly for the best possible result.

Artwork Dimensions
Bleed of at least 2mm
All text and critical elements are inside the safe area
Single page PDF
CMYK images
Fonts embedded



Supplying your file to us



EMAIL

If your file is under 15MB then you can supply it to us via email.

USB

We can accept files supplied on USB. Just bring it into our office and we can copy the file to our server.

WE TRANSFER

Go to wetransfer.com to send large files up to 2GB

